


Product number: 68257

# NFC Sticker PVC - On-Metal - 30 mm - NTAG216 - 924 Byte - white | without print

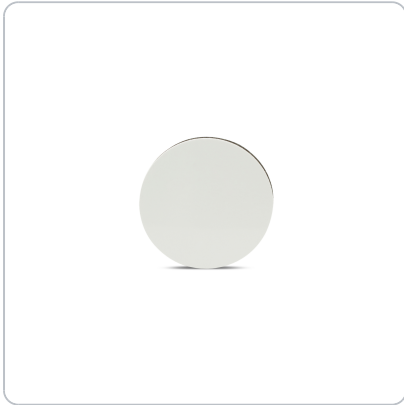

## Product information

The NFC On-Metal Sticker enables the use of NFC on metallic surfaces, both indoors and outdoors. With the NTAG216 chipset, the sticker offers sufficient storage capacity for contact data. Of course, it can also be used for digital marketing campaigns on posters and flyers. Thanks to its on-metal property, this sticker is particularly suitable for inventorying metallic objects.

## Short description

- PVC material, rigid, 3M adhesive surface
- suitable for metallic/conductive surfaces
- Diameter: 30 mm
- Indoor and outdoor use
- Ambient temperature -25 to +70 degrees
- NXP NTAG216 (NTAG216) - 924 Byte (NDEF: 868 Byte)

## Product description

### NFC product

The on-metal sticker is made of waterproof PVC and has an additional layer that ensures perfect NFC function on metallic surfaces. The back has a 3M adhesive layer that provides the necessary adhesive strength. The sticker has a diameter of 30 mm and a material thickness of 1.26 mm. The invisibly integrated NFC chip is compatible with all NFC-enabled smartphones.

### NFC chip

The white PVC sticker is equipped with the original NXP NTAG216, which to date offers the largest available memory space in the NTAG21x series. The NXP NTAG21x series impresses with the greatest possible compatibility, good performance and intelligent additional functions. The NTAG216 has a total capacity of 924 bytes (free memory 888 bytes), of which 868 bytes are usable memory in the NDEF. Each individual chip has a unique serial number (UID) consisting of 7 bytes (alphanumeric, 14 characters). The NFC chip can be written to up to 100,000 times and has a data retention period of 10 years. The NTAG216 has the UID ASCII mirror feature, with which the UID of the tag can be appended to

the NDEF message, as well as an integrated NFC counter, which is automatically incremented during readout. Both functions are not activated by default. The NTAG216 is compatible with all NFC-enabled smartphones, the NFC21 tools and all ISO14443 end devices.

- Total capacity: 924 bytes
  - Free memory: 888 bytes
  - Usable memory NDEF: 868 bytes
- 

Do you need higher quantities?

[Contact us](#)

## Product properties

<b>Product number</b>	68257
<b>Chip</b>	NXP NTAG216
<b>Adhesive layer</b>	Yes (3M)
<b>Functions</b>	Write protection, UID ASCII Mirror, 32-bit Password, 24-bit Counter, ASCII Mirror, 7 Byte UID, ECC-based original signature, true anticollision, rewritable
<b>Detail colour</b>	white
<b>Frequency</b>	13.56 MHz
<b>Sticker thickness</b>	1,2 mm (+/-0,05 mm)
<b>On metal layer</b>	0,3 mm
<b>Data transfer rates</b>	106 kbit/s
<b>Dimensions</b>	30 mm Ø
<b>Material</b>	PVC
<b>Storage temperature</b>	Min -55°C - Max +125°C
<b>Type</b>	Sticker
<b>Chip standards / ISO Norm</b>	ISO 14 443-3 A, ISO 14 443-2 A
<b>On-metal</b>	on metal
<b>Operating temperature</b>	Min -25°C - Max +70°C
<b>Data retention</b>	10 years
<b>Antenna format</b>	23 mm
<b>Number of write operations</b>	100.000 times
<b>Colour category</b>	white

<b>Carrier layer</b>	30 mm
<b>Product form</b>	round
<b>Compatibility</b>	to NFC-enabled smartphones: 100%
<b>Available colours</b>	white
<b>Further links</b>	ntag
<b>Material thickness</b>	1,26 mm (T)
<b>Weight</b>	2 g
<b>Antenna</b>	Copper
<b>NFC Forum Type</b>	NFC Forum type 2
<b>Memory</b>	924 Byte (free: 888 Byte, NDEF: 868 Byte)

## More images