


Product number: 68579

NFC Sticker PVC On-Metal - 30 mm - NTAG213 - 180 Byte - black | without print | black

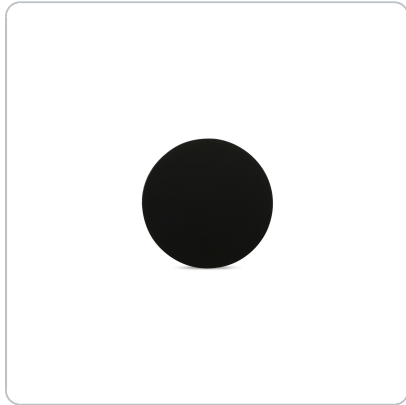

Product information

The NFC On-Metal Sticker made of PVC enables the use of NFC on metallic surfaces, both indoors and outdoors. Thanks to its robust material, the NFC functionality remains unrestricted even outdoors. This product is particularly suitable for object protection and product identification, especially if the surface is made of metal.

Short description

- PVC material, rigid, 3M adhesive surface
- suitable for metallic/conductive surfaces
- Diameter: 30 mm
- Indoor and outdoor use
- Ambient temperature -25 to +70 degrees
- NXP NTAG213 (NTAG213) - 180 bytes (NDEF: 137 bytes)

Product description

NFC product

The on-metal sticker is made of PVC and is therefore waterproof. An additional layer ensures that the NFC function also works perfectly on metallic surfaces. The back has a 3M adhesive layer that gives the sticker the necessary adhesion. The sticker has a diameter of 30 mm and a material thickness of approx. 1.30 mm. The NFC chip is invisibly integrated into the sticker and can withstand temperatures between -25 degrees and 70 degrees. The product is compatible with all NFC-enabled smartphones.

NFC chip

The white PVC sticker is equipped with the original NXP NTAG213 and offers a cost-effective entry into the NTAG21x series. The NXP NTAG21x series impresses with the greatest possible compatibility, good performance and intelligent additional functions. The NTAG213 has a total capacity of 180 bytes (free memory 144 bytes), of which 137 bytes are usable memory in the NDEF. Each individual chip has a unique serial number (UID) consisting of 7 bytes (alphanumeric, 14 characters). The NFC chip can be written to up to 100,000 times and has a data retention period of 10 years. The NTAG213 has the UID

ASCII mirror feature, with which the UID of the tag can be appended to the NDEF message, as well as an integrated NFC counter, which increases automatically when reading. Both functions are not activated by default. The NTAG213 is compatible with all NFC-enabled smartphones, the NFC21 tools and all ISO14443 end devices.

- Total capacity: 180 bytes
- Free memory: 144 bytes
- Usable memory NDEF: 137 bytes

Do you need higher quantities?

[Contact us](#)

Product properties

Product number	68579
Adhesive layer	Yes (3M)
Memory	180 Byte (free: 144 Byte, NDEF: 137 Byte)
Functions	Write protection, UID ASCII Mirror, 32-bit Password, 24-bit Counter, ASCII Mirror, 7 Byte UID, ECC-based original signature, true anticollision, rewritable
Available colours	yellow, black, red, white
Frequency	13.56 MHz
Weight	0,72 g
Ambient temperature	-25 to 70 degrees
Chip	NXP NTAG213
Data transfer rates	106 kbit/s
Dimensions	30 mm Ø
Material	PVC
Storage temperature	Min -55°C - Max +125°C
Type	Sticker
Material thickness	1,43 mm (T)
Chip standards / ISO Norm	ISO 14 443-3 A, ISO 14 443-2 A
On-metal	on metal
Operating temperature	Min -25°C - Max +70°C
Data retention	10 years
Antenna format	23 mm

Number of write operations	100.000 times
Detail colour	black
Colour category	black
Product form	round
Compatibility	to NFC-enabled smartphones: 100%
Further links	ntag
Antenna	Copper
NFC Forum Type	NFC Forum type 2
Delivery options	single
On metal layer	0,2 mm

More images

