


Product number: 17183

# NFC sticker PVC - On-Metal - 20 x 20 mm - NTAG216 - 924 bytes - white glossy | without print

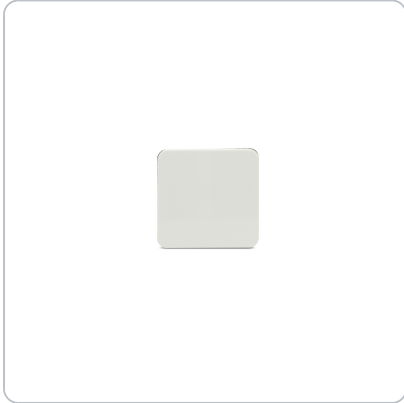

## Product information

The NFC On-Metal Sticker enables the use of NFC on metallic surfaces, both indoors and outdoors. With the NTAG216 chipset, the sticker offers sufficient storage capacity for contact data. Of course, it can also be used for digital marketing campaigns on posters and flyers. Thanks to its on-metal property, this sticker is particularly suitable for inventorying metallic objects.

## Short description

- PVC material, rigid, 3M adhesive layer
- Suitable for metallic/conductive surfaces
- Format: 20 x 20 mm
- Indoor and outdoor use
- Ambient temperature from -25 to +70 degrees
- NXP NTAG216 (NTAG216) - 924 bytes (NDEF: 868 bytes)

## Product description

### NFC product

The NFC On-Metal Sticker is made of PVC and is therefore waterproof. An additional layer ensures that the NFC function also works perfectly on metallic surfaces. The back has a 3M adhesive layer, which gives the sticker the necessary adhesive strength. The sticker measures 20 x 20 mm and has a material thickness of 1.33 mm. The NFC chip is invisibly integrated into the sticker and can withstand temperatures between -25 °C and 70 °C. This item is compatible with all NFC-enabled smartphones.

### NFC chip

The NFC sticker is equipped with the original NXP NTAG216, which to date offers the largest available memory space in the NTAG21x series. The NXP NTAG21x series impresses with the greatest possible compatibility, good performance and intelligent additional functions. The NTAG216 has a total capacity of 924 bytes (free memory 888 bytes), of which 868 bytes are usable memory in the NDEF. Each individual

chip has a unique serial number (UID) consisting of 7 bytes (alphanumeric, 14 characters). The NFC chip can be written to up to 100,000 times and has a data retention period of 10 years. The NTAG216 has the UID ASCII mirror feature, with which the UID of the tag can be appended to the NDEF message, as well as an integrated NFC counter, which is automatically incremented during readout. Both functions are not activated by default. The NTAG216 is compatible with all NFC-enabled smartphones, the NFC21 tools and all ISO14443 end devices.

- Total capacity: 924 bytes
- Free memory: 888 bytes
- Usable memory NDEF: 868 bytes

---

Do you need higher quantities?

[Contact us](#)

## Product properties

<b>Product number</b>	17183
<b>Chip</b>	NXP NTAG216
<b>Adhesive layer</b>	Yes (3M)
<b>Material thickness</b>	1,33 mm (T)
<b>Weight</b>	0,79 g
<b>Frequency</b>	13.56 MHz
<b>Data transfer rates</b>	106 kbit/s
<b>Material</b>	PVC
<b>Storage temperature</b>	Min -55°C - Max +125°C
<b>Type</b>	Sticker
<b>Chip standards / ISO Norm</b>	ISO 14 443-3 A, ISO 14 443-2 A
<b>On-metal</b>	on metal
<b>Operating temperature</b>	Min -25°C - Max +70°C
<b>Data retention</b>	10 years
<b>Number of write operations</b>	100.000 times
<b>Colour category</b>	white
<b>Detail colour</b>	white glossy
<b>Compatibility</b>	to NFC-enabled smartphones: 100%
<b>Further links</b>	ntag
<b>Dimensions</b>	20 x 20 mm (B x H)
<b>Antenna</b>	Aluminium
<b>Product form</b>	square

<b>NFC Forum Type</b>	NFC Forum type 2
<b>Water resistance</b>	waterproof (IP67)
<b>Memory</b>	924 Byte (free: 888 Byte, NDEF: 868 Byte)

## More images