


Product number: 17156UN1

NFC sticker PVC printed - On-Metal - 28 x 28 mm - NTAG424 DNA - 416 bytes - white glossy | printed on one side

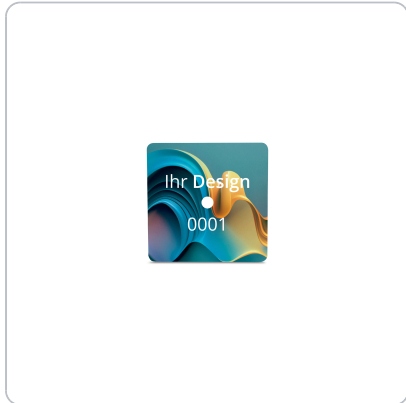

Product information

The white NFC sticker offers a high level of security thanks to its integrated NTAG424 DNA chip and thus extends the familiar NTAG functions (UID, UID mirror, etc.) with additional cryptographic mechanisms, which enable the storage of AES-128 protected data, the generation of signatures, encrypted UID or randomized ID, among other things. This type of chip is therefore ideal for lotteries, authenticity certification or use in IoT applications.

Short description

- PVC material, rigid, 3M adhesive layer
- Suitable for metallic/conductive surfaces
- Format: 28 x 28 mm mm
- Indoor and outdoor use
- Ambient temperature -25 to +70 degrees
- NXP NTAG 424 DNA - 416 bytes (NDEF: 256 bytes)
- Printed on one side
- 4-color printable
- Print finish: satin

Product description

NFC product

The NFC sticker made of PVC is characterized by a robust and waterproof material. With a format of 28 x 28 mm and a 3 mm hole in the middle as well as a material thickness of around 1.3 mm, the sticker is versatile. Thanks to the on-metal layer, the sticker also works on metallic or conductive surfaces. It is suitable for both indoor and outdoor use. The 3M adhesive layer ensures reliable adhesion to various surfaces.

Print

Our products are printed using a process that offers high resolution, colour accuracy and durability. This makes it possible to display images in photorealistic quality or to print even tiny font sizes legibly. This environmentally friendly technology enables us to personalise your products on one or both sides and add logos, images, text or other designs from a wide range of colours. The applied colour layer is abrasion-resistant and resistant to water, sunlight and chemicals.

For your desired design, simply download our suitable [print template](#) and provide us with your desired print layout conveniently via our configurator.

NFC chip

The The NFC sticker made of PVC is equipped with the NTAG424 DNA, which is the successor to the NTAG413 DNA, adds additional functions and is recommended for use in applications with increased security requirements. The chipset supports AES-secured authentication of content as well as the Secure Unique Message feature (SUN) for generating a unique character string (HASH) based on a secret key. The generated character string can be appended to a stored NDEF URL, for example, and can then be checked on the server side. The basis for this is the previously configured shared secret. The full potential of the chipset can therefore only be exploited with the appropriate infrastructure.

The NTAG424 has a total capacity of 416 bytes, which is divided into two usable memory areas (256 bytes + 128 bytes). The 256 byte memory area offers space for NDEF messages whereas the 128 byte area is intended for encrypted data. Each chip has a unique serial number (UID) consisting of 7 bytes (alphanumeric, 14 characters). The NFC chip can be written to up to 200,000 times and has a data retention period of 50 years. Of course, the NTAG413 also has the standard functions of the NTAG series in the form of the UID ASCII mirror feature, with which the UID of the tag can be appended to the NDEF message, as well as an integrated NFC counter, which increases automatically during readout. Encryption is based on the AES-128 standard. Other features include an encrypted UID, a randomized ID and an ECC signature. The extended functions are not activated by default. The NTAG424 is compatible with all NFC-enabled smartphones and all ISO14443 end devices.

- Total capacity: 416 bytes
- Free memory: 256 bytes + 128 bytes secure memory
- Usable memory NDEF: 249 bytes

Do you need higher quantities?

[Contact us](#)

Product properties

Product number	17156UN1
Weight	1,9 g
Dimensions	28 x 28 mm (B x H)
Antenna format	24 x 24 mm
Adhesive layer	Yes (3M)
Frequency	13.56 MHz
Data transfer rates	106 kbit/s
Number of write operations	200.000 times
Material	PVC
Storage temperature	Min -55°C - Max +125°C
Type	Sticker
On-metal	on metal
Operating temperature	Min -25°C - Max +70°C
Colour category	white
Detail colour	white glossy
Chip standards / ISO Norm	ISO/IEC 14443A
Lochung	3 mm Ø
Compatibility	to NFC-enabled smartphones: 100%
Chip	NXP NTAG424 DNA
Memory	416 Byte (NDEF: 256 Byte)
Antenna	Aluminium
Product form	square

Data retention	50 years
Material thickness	1,3 mm (T)
NFC Forum Type	NFC Forum type 4
Water resistance	waterproof (IP67)

More images

