


Product number: 17162

# NFC Sticker PVC - On-Metal - 80,5 x 80,5 mm - NTAG213 - 180 bytes - white glossy | without print

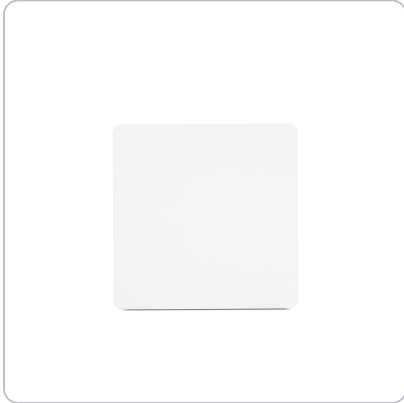

## Product information

The PVC NFC sticker is suitable for a wide range of applications thanks to its size and rigid, waterproof material. From rating buttons to information signs, there are no limits to the ideas. With the NXP NTAG213 chip and 180 bytes of memory, it offers optimum functionality and sufficient memory for a URL that links to the desired destination.

## Short description

- PVC material, rigid
- Suitable for metallic/conductive surfaces
- Format: 80,5 x 80,5 mm
- Indoor and outdoor use
- Ambient temperature from -25 to +70 degrees
- NXP NTAG213 (NTAG213) - 180 bytes (NDEF: 137 bytes)

## Product description

### NFC product

The glossy white NFC sticker is made of PVC and is characterised by a smooth surface. With a format of 80.5 x 80.5 mm and a material thickness of 1.35 mm, it is large enough to display information clearly, but still handy. The 3M adhesive layer ensures excellent adhesion to a variety of surfaces. The on-metal layer ensures that the sticker can be used without restriction on metallic or conductive surfaces. As the PVC NFC sticker is waterproof to IP67, it can be used both indoors and outdoors.

### NFC chip

The PVC sticker is equipped with the original NXP NTAG213 and offers a cost-effective entry into the NTAG21x series. The NXP NTAG21x series impresses with the greatest possible compatibility, good performance and intelligent additional functions. The NTAG213 has a total capacity of 180 bytes (free memory 144 bytes), of which 137 bytes are usable memory in the NDEF. Each individual chip has a

unique serial number (UID) consisting of 7 bytes (alphanumeric, 14 characters). The NFC chip can be written to up to 100,000 times and has a data retention period of 10 years. The NTAG213 has the UID ASCII mirror feature, with which the UID of the tag can be appended to the NDEF message, as well as an integrated NFC counter, which is automatically incremented during readout. Both functions are not activated by default. The NTAG213 is compatible with all NFC-enabled smartphones, the NFC21 tools and all ISO14443 end devices.

- Total capacity: 180 bytes
- Free memory: 144 bytes
- Usable memory NDEF: 137 bytes

---

Do you need higher quantities?

[Contact us](#)

## Product properties

<b>Product number</b>	17162
<b>Dimensions</b>	80,5 x 80,5 mm (B x H)
<b>Weight</b>	15,66 g
<b>Antenna format</b>	70 x 70 mm
<b>Adhesive layer</b>	Yes (3M)
<b>Memory</b>	180 Byte (free: 144 Byte, NDEF: 137 Byte)
<b>Frequency</b>	13.56 MHz
<b>Chip</b>	NXP NTAG213
<b>Data transfer rates</b>	106 kbit/s
<b>Material thickness</b>	1,35 mm (T)
<b>Material</b>	PVC
<b>Storage temperature</b>	Min -55°C - Max +125°C
<b>Type</b>	Sticker
<b>Chip standards / ISO Norm</b>	ISO 14 443-3 A, ISO 14 443-2 A
<b>On-metal</b>	on metal
<b>Operating temperature</b>	Min -25°C - Max +70°C
<b>Data retention</b>	10 years
<b>Number of write operations</b>	100.000 times
<b>Colour category</b>	white
<b>Detail colour</b>	white glossy
<b>Compatibility</b>	to NFC-enabled smartphones: 100%
<b>Further links</b>	ntag

<b>Antenna</b>	Aluminium
<b>Product form</b>	square
<b>NFC Forum Type</b>	NFC Forum type 2
<b>Water resistance</b>	waterproof (IP67)

## More images