


Product number: 69026

NFC Starter Kit FPC - On-Metal - 25 pieces - NTAG213 - 180 Byte - gold - waterproof

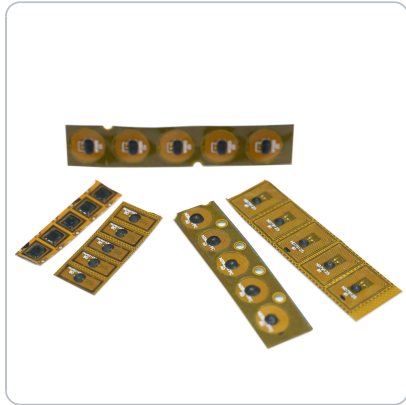

coe-datasheet-sw6.pdf.productInformation

Especially for industrial use we offer stickers made of FPC material. This FPC starter kit is a selection of the most popular FPC stickers. The FPC material makes the stickers flexible and offers protection against moisture (IP68). The stickers can be used for up to 30 minutes in the 140°C temperature range and up to 2 seconds in the 260°C temperature range. These stickers contain an additional insulating layer / ferrite layer so that they can also be applied to conductive objects.

Short description

- FPC material, flexible, self-adhesive
- suitable for metallic/conductive surfaces
- Indoor and outdoor application
- Ambient temperature from -25 to +70 degrees
- NXP NTAG213 (NTAG213) - 180 Byte (NDEF: 137 Byte)

Product description

The FPC material is flexible and can therefore be used on slightly curved surfaces. The sticker's chipset is compatible with all popular NFC-enabled smartphones. The following FPC stickers are included in this package:

- 5 x 68918 - NFC Sticker FPC On-Metal, 4 x 10 mm, NTAG213, 180 Byte, gold.
- 5 x 68920 - NFC Sticker FPC On-Metal, 5 x 5 mm, NTAG213, 180 Byte, gold
- 5 x 68922 - NFC Sticker FPC On-Metal, 8 mm, NTAG213, 180 Byte, gold
- 5 x 68924 - NFC Sticker FPC On-Metal, 10 mm, NTAG213, 180 Byte, gold
- 5 x 68926 - NFC Sticker FPC On-Metal, 8 x 13 mm, NTAG213, 180 Byte, gold

NFC chip

The self-adhesive FPC sticker is equipped with the original NXP NTAG213 and offers a cost-effective entry into the NTAG21x series. The NXP NTAG21x series impresses with the greatest possible compatibility, good performance and intelligent additional functions. The NTAG213 has a total capacity of 180 bytes (free memory 144 bytes), thereof usable memory in the NDEF 137 bytes. Each individual chip has a unique serial number (UID) consisting of 7 bytes (alphanumeric, 14 characters). The NFC chip can be written up to 100,000 times and has a data retention of 10 years. The NTAG213 has the UID ASCII Mirror feature, which allows the tag's UID to be appended to the NDEF message, as well as an integrated

NFC counter that automatically increments during readout. Both features are not enabled by default. The NTAG213 is compatible with all NFC-enabled smartphones, the NFC21 tools and all ISO14443 terminals.

- Total capacity: 180 byte
- Free memory: 144 byte
- Usable memory NDEF: 137 byte

Product properties

Product number	69026
Further links	starterkit
Water resistance	waterproof (IP68)
Frequency	13.56 MHz
Material	FPC
Chip	NXP NTAG213
Data transfer rates	106 kbit/s
Dimensions	8 x 13 mm (W x H), 8 mm Ø, 5 x 5 mm (W x H), 4 x 10 mm (W x H), 10 mm Ø
Storage temperature	Min -55°C - Max +125°C
Type	Sticker
Chip standards / ISO Norm	ISO 14 443-3 A, ISO 14 443-2 A
On-metal	on metal
Operating temperature	Min -25°C - Max +70°C
Data retention	10 years
Number of write operations	100.000 times
Product form	rectangular, round, square
Material thickness	0,15 bis 0,55 mm (T)
Available colours	gold
Compatibility	to NFC-enabled smartphones: 100%
Colour category	gold
Adhesive layer	Yes

Detail colour	gold
NFC Forum Type	NFC Forum type 2

More images

