


Product number: 68922

# NFC Sticker FPC - On-Metal - 8 mm - NTAG213 - 180 Byte - gold

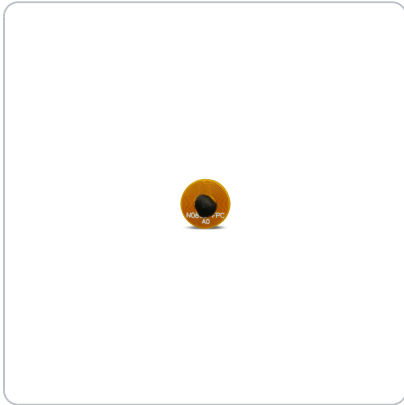

## Product information

With a diameter of 8 mm, the NFC sticker made of FPC material can be accommodated in a space-saving manner and is especially suitable for industrial use due to its heat resistance.

## Short description

- FPC material, rigid, self-adhesive
- Suitable for metallic/conductive surfaces
- Format: 8 mm diameter
- Indoor and outdoor use
- Ambient temperature from -25 to +70 degrees
- NXP NTAG213 (NTAG213) - 180 Byte (NDEF: 137 Byte)

## Product description

### NFC product

The FPC On-Metal Sticker has a format of 8 mm and can also be used on conductive/metallic as well as slightly curved surfaces. The material thickness including the ferrite layer is 0.85 mm in the area of the NFC chip and 0.35 mm outside the NFC chip area. The reading range is 8 - 12 mm. The chip set of the sticker is compatible with all current NFC-capable smartphones.

### NFC chip

The self-adhesive FPC sticker is equipped with the original NXP NTAG213 and offers a cost-effective entry into the NTAG21x series. The NXP NTAG21x series impresses with the greatest possible compatibility, good performance and intelligent additional functions. The NTAG213 has a total capacity of 180 bytes (free memory 144 bytes), thereof usable memory in the NDEF 137 bytes. Each individual chip has a unique serial number (UID) consisting of 7 bytes (alphanumeric, 14 characters). The NFC chip can be written up to 100,000 times and has a data retention of 10 years. The NTAG213 has the UID ASCII Mirror feature, which allows the tag's UID to be appended to the NDEF message, as well as an integrated NFC counter that automatically increments during readout. Both features are not enabled by default. The NTAG213 is compatible with all NFC-enabled smartphones, the NFC21 tools and all ISO14443 terminals.

- Total capacity: 180 byte

- Free memory: 144 byte
- Usable memory NDEF: 137 byte

## Product properties

<b>Product number</b>	68922
<b>Memory</b>	180 Byte (free: 144 Byte, NDEF: 137 Byte)
<b>Material thickness</b>	0,8 mm (T)
<b>Water resistance</b>	waterproof (IP68)
<b>Frequency</b>	13.56 MHz
<b>Antenna</b>	FPC
<b>Ambient temperature</b>	-25 to 70 degrees
<b>Material</b>	FPC
<b>Chip</b>	NXP NTAG213
<b>Data transfer rates</b>	106 kbit/s
<b>Weight</b>	0,052 g
<b>Storage temperature</b>	Min -55°C - Max +125°C
<b>Type</b>	Sticker
<b>Dimensions</b>	8 mm Ø
<b>Chip standards / ISO Norm</b>	ISO 14 443-3 A, ISO 14 443-2 A
<b>On-metal</b>	on metal
<b>Operating temperature</b>	Min -25°C - Max +70°C
<b>Data retention</b>	10 years
<b>Number of write operations</b>	100.000 times
<b>Available colours</b>	gold
<b>Product form</b>	round
<b>Compatibility</b>	to NFC-enabled smartphones: 100%

<b>Colour category</b>	gold
<b>Further links</b>	ntag
<b>Adhesive layer</b>	Yes
<b>Detail colour</b>	gold
<b>Antenna format</b>	8 mm
<b>NFC Forum Type</b>	NFC Forum type 2

## More images

