


Product number: 68410

NFC Sticker PET - On-Metal - 30 mm - NTAG213 - 180 Byte - white

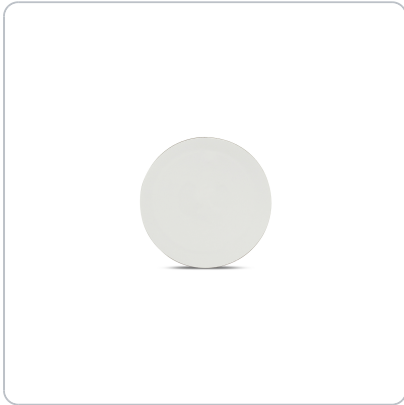

Product information

The white PET On-Metal Sticker is the right choice for anyone who needs an unobtrusive sticker for metallic/conductive surfaces. This sticker is particularly suitable for inventorying metallic objects due to its on-metal nature, as well as for use in marketing campaigns where the sticker needs to be applied to a metallic surface.

Short description

- PET material, flexible, self-adhesive
- suitable for metallic/conductive surfaces
- 30 mm diameter
- Application indoor, conditionally also outdoor
- Ambient temperature from -25 to +70 degrees
- NXP NTAG213 (NTAG213) - 180 Byte (NDEF: 137 Byte)

Product description

NFC Product

The surface material of the white NFC sticker is made of PET. The material is therefore conditionally waterproof, so that the sticker can withstand moisture even in moderation. The sticker has a diameter of 30 mm and a material thickness of 0.45 mm. The antenna is easily visible from the outside because the sticker is white. The chipset of the sticker is compatible with all current NFC-enabled smartphones.

NFC chip

The self-adhesive PET sticker is equipped with the original NXP NTAG213 and offers a cost-effective entry into the NTAG21x series. The NXP NTAG21x series impresses with the greatest possible compatibility, good performance and intelligent additional functions. The NTAG213 has a total capacity of 180 bytes (free memory 144 bytes), thereof usable memory in the NDEF 137 bytes. Each individual chip has a unique serial number (UID) consisting of 7 bytes (alphanumeric, 14 characters). The NFC chip can be written up to 100,000 times and has a data retention of 10 years. The NTAG213 has the UID ASCII Mirror feature, which allows the tag's UID to be appended to the NDEF message, as well as an integrated NFC counter that automatically increments during readout. Both features are not enabled by default. The NTAG213 is compatible with all NFC-enabled smartphones, the NFC21 tools and all ISO14443 terminals.

- Total capacity: 180 byte
- Free memory: 144 byte
- Usable memory NDEF: 137 byte

Product properties

Product number	68410
Adhesive layer	Yes (3M)
Memory	180 Byte (free: 144 Byte, NDEF: 137 Byte)
Functions	Write protection, UID ASCII Mirror, 32-bit Password, 24-bit Counter, ASCII Mirror, 7 Byte UID, ECC-based original signature, true anticollision, rewritable
Sticker thickness	0,55mm (+/-0,05 mm)
Detail colour	white
Frequency	13.56 MHz
Antenna	FPC, Aluminium
Weight	0,72 g
Ambient temperature	-25 to 70 degrees
Chip	NXP NTAG213
Data transfer rates	106 kbit/s
Dimensions	30 mm Ø
Storage temperature	Min -55°C - Max +125°C
Type	Sticker
Material thickness	0,46 mm (T)
Chip standards / ISO Norm	ISO 14 443-3 A, ISO 14 443-2 A
On-metal	on metal
Operating temperature	Min -25°C - Max +70°C
Data retention	10 years

Antenna format	23 mm
Number of write operations	100.000 times
Carrier layer	35 x 35 mm
Colour category	white
Material	PET
Product form	round
Compatibility	to NFC-enabled smartphones: 100%
Available colours	white
Further links	ntag
NFC Forum Type	NFC Forum type 2
Delivery options	single
On metal layer	0,2 mm

More images

